


Features

- High intensity
- Wide viewing angle
- General purpose leads
- Reliable and rugged

Package Dimensions

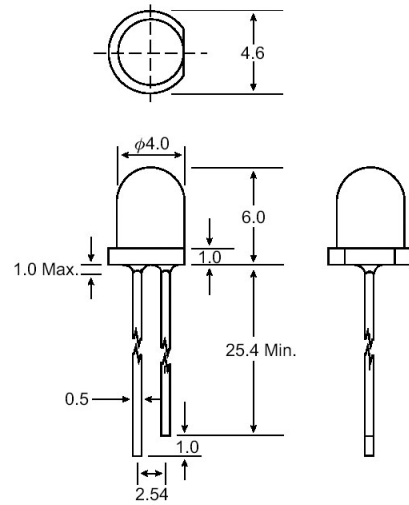

Unit: mm (inches)

Tolerance: $\pm 0.25\text{mm}$ (.010") max

Absolute Maximum Ratings at Ta=25

Parameter	Max.	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	40	mA
Derating Linear From 50	0.4	mA /
Reverse Voltage	5	V
Operating Temperature Range	-40 to +80	
Storage Temperature Range	-40 to +80	
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds	

Notes:

1. All dimensions are in millimeters (inches).
2. Protruded resin under flange is 1.0mm (.04") max.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

Part No.	Emitted Color	Lens Color	Peak Wavelength λ_p (nm)	Vf (V) $I_f = 20\text{mA}$ (Note E1)		Iv (mcd) (Note E2)		Viewing Angle $2\theta_{1/2}$ (Deg) (Note E3)
				Min	Typ	Min	Typ	
EL-4R831	Red	Red Diffused	660	1.6	1.8	12	35	80
EL-4G831	Green	Green Diffused	568	1.7	2.2	5.0	15	80
EL-4Y831	Yellow	Yellow Diffused	590	1.6	2.1	15	35	80
EL-4O831	Orange	Orange Diffused	610	1.6	2.1	22	45	80
EL-4R432	Red	Water Clear	660	1.6	1.8	50	75	40
EL-4G432	Green	Water Clear	568	1.7	2.2	18	55	40
EL-4Y432	Yellow	Water Clear	590	1.6	2.1	55	85	40
EL-4R433	Red	Red Transparent	660	1.6	1.8	50	75	40
EL-4G433	Green	Green Transparent	568	1.7	2.2	18	55	40
EL-4Y433	Yellow	Yellow Transparent	590	2.0	2.6	55	85	40

Parameter

Luminous Intensity

Dominant Wavelength

Peak Emission Wavelength

Viewing Angle

Spectral Line Half-Width

Forward Voltage

Reverse Current

Test Condition

$I_f = 20\text{mA}$ (Note E1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.)

$I_f = 20\text{mA}$ (Note E2: The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.)

$I_f = 20\text{mA}$

(Note E3. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.)

$I_f = 20\text{mA}$

$I_f = 20\text{mA}$

$I_f = 20\text{mA}$