
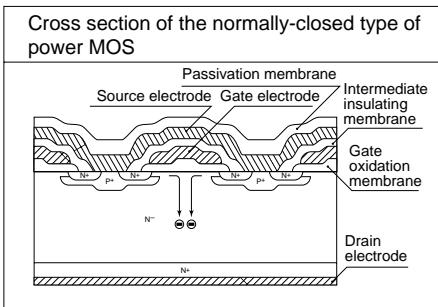


# NAIS

## GU (General Use)-E Type [1-Channel (Form B) Type]

# PhotoMOS RELAYS

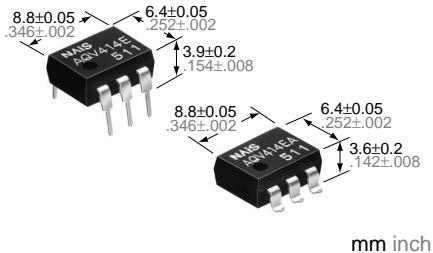

### 2. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 3. High sensitivity, low ON resistance

Can control a maximum 0.13 A load current with a 5 mA input current. Low ON resistance of 18 Ω (AQV410EH). Stable operation because there are no metallic contact parts.

### 4. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 100 pA even with the rated load voltage of 400 V (AQV414E).

### 5. Reinforced insulation 5,000 V type also available.

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

## FEATURES

### 1. Low on resistance for normally-closed type

This has been realized thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-diffused and Selective Doping) method.

### 2. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 3. High sensitivity, low ON resistance

Can control a maximum 0.13 A load current with a 5 mA input current. Low ON resistance of 18 Ω (AQV410EH). Stable operation because there are no metallic contact parts.

## TYPICAL APPLICATIONS

- Security equipment
- Telephone equipment (Dial pulse)
- Measuring equipment

## TYPES

Type	I/O isolation voltage	Output rating*		Part No.				Packing quantity	
				Through hole terminal		Surface-mount terminal			
		Load voltage	Load current	Tube packing style		Tape and reel packing style	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube
AC/DC type	1,500 V AC (Standard)	400 V	120 mA	AQV414E	AQV414EA	AQV414EAX	AQV414EAZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.
	5,000 V AC (Reinforced)	350 V	130 mA	AQV410EH	AQV410EHA	AQV410EHAX	AQV410EHAZ		
AC/DC type	400 V	120 mA	AQV414EH	AQV414EHA	AQV414EHAX	AQV414EHAZ	AQV414EHAZ	1 tube contains 500 pcs.	1,000 pcs.

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV414E(A)	AQV410EH(A)	AQV414EH(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA			
	LED reverse voltage	V <sub>R</sub>		3 V		
	Peak forwd current	I <sub>FP</sub>		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	400 V	350 V	400 V	
	Continuous load current	I <sub>L</sub>	A	0.12 A	0.13 A	
			B	0.13 A	0.15 A	A connection: Peak AC, DC B,C connection: DC
			C	0.15 A	0.17 A	
	Peak load current	I <sub>peak</sub>		0.3 A	0.4 A	0.3 A
	Power dissipation	P <sub>out</sub>		500 mW		
	Total power dissipation	P <sub>T</sub>		550 mW		
I/O isolation voltage		V <sub>iso</sub>	1,500 V AC	5,000 V AC	5,000 V AC	
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F			

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)


Item			Symbol	Type of connection	AQV414E(A)	AQV410EH(A)	AQV414EH(A)	Condition
Input	LED operate (OFF) current	Typical	$I_{Foff}$	—	1.45 mA	1.9 mA	1.75 mA	$I_L = \text{Max.}$
		Maximum			3.0 mA			
	LED reverse (ON) current	Minimum	$I_{For}$	—	0.3 mA	0.4 mA	0.3 mA	$I_L = \text{Max.}$
		Typical			1.40 mA	1.8 mA	1.70 mA	
	LED dropout voltage	Typical	$V_F$	—	1.14 V (1.25 V at $I_F = 50$ mA)			$I_F = 5$ mA
		Maximum			1.5 V			
Output	On resistance	Typical	$R_{on}$	A	26 Ω	18 Ω	25.2 Ω	$I_F = 0$ mA $I_L = \text{Max.}$ Within 1 s on time
		Maximum			50 Ω	35 Ω	50 Ω	
		Typical	$R_{on}$	B	20 Ω	13 Ω	19 Ω	$I_F = 0$ mA $I_L = \text{Max.}$ Within 1 s on time
		Maximum			25 Ω	17.5 Ω	25 Ω	
	Off state leakage current	Typical	$R_{on}$	C	10 Ω	6.5 Ω	10 Ω	$I_F = 0$ mA $I_L = \text{Max.}$ Within 1 s on time
		Maximum			12.5 Ω	8.8 Ω	12.5 Ω	
	Switching speed	Maximum	$I_{Leak}$	—	1 μA	10 μA	10 μA	$I_F = 5$ mA $V_L = \text{Max.}$
	Reverse (ON) time*	Typical	$T_{off}$	—	0.7 ms	1.5 ms	1.3 ms	$I_F = 0$ mA → 5 mA $I_L = \text{Max.}$
	Maximum	2.0 ms			3.0 ms	3.0 ms		
Transfer characteristics	I/O capacitance	Typical	$T_{on}$	—	0.1 ms	0.3 ms	0.3 ms	$I_F = 5$ mA → 0 mA $I_L = \text{Max.}$
		Maximum			1.0 ms	1.5 ms	1.5 ms	
	Initial I/O isolation resistance	Typical	$C_{iso}$	—	0.8 pF	0.8 pF	0.8 pF	$f = 1$ MHz $V_B = 0$
		Maximum			1.5 pF			
	Minimum	$R_{iso}$	—	1,000 MΩ			500 V DC	

Note: Recommendable LED forward current

Standard type  $I_F = 5$  mAReinforced type  $I_F = 5$  to 10 mA

\*Operate/Reverse time

For type of connection, see Page 445.

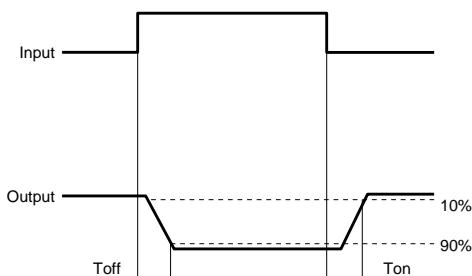


- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 445.
- For Cautions for Use, see Page 449.

## REFERENCE DATA


## 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F


Type of connection: A

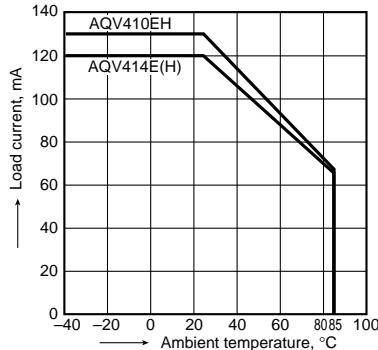

## 2. On resistance vs. ambient temperature characteristics

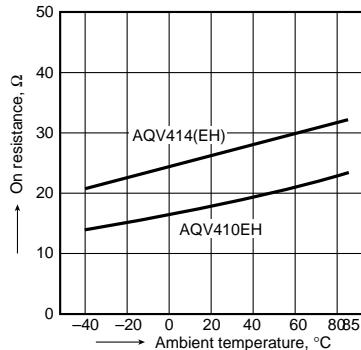Measured portion: between terminals 4 and 6;  
LED current: 0 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)


## 3. Operate (OFF) time vs. ambient temperature characteristics

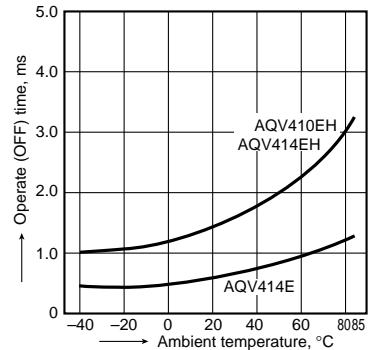LED current: 5mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

# AQV414E, AQV410EH


## 4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

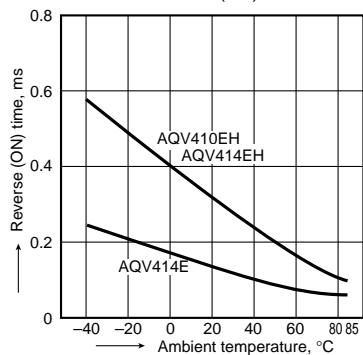


## 5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

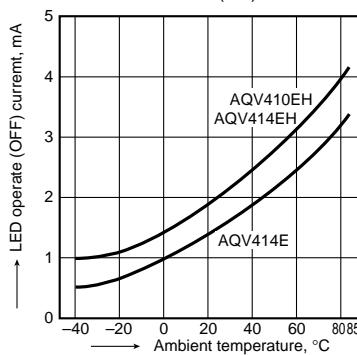


## 6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

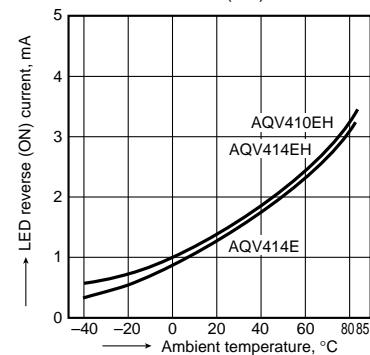


## 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

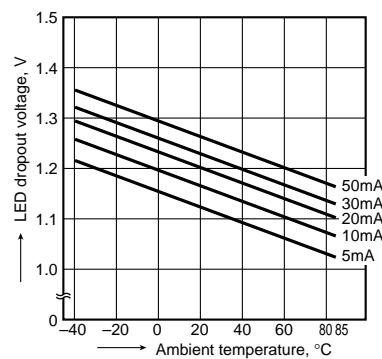


## 8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

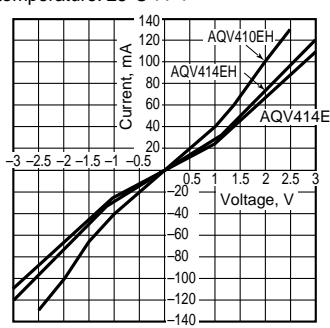


## 9. Off state leakage current

Measured portion: between terminals 4 and 6; LED current: 5 mA; Ambient temperature: 25°C 77°F

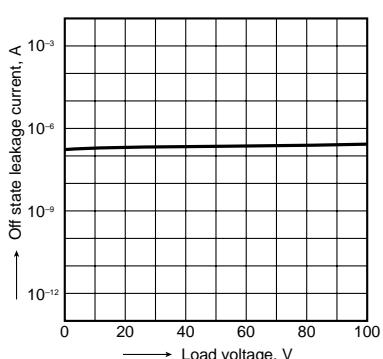


## 10. LED forward current vs. operate (OFF) time characteristics

Measured portion: between terminals 4 and 6; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

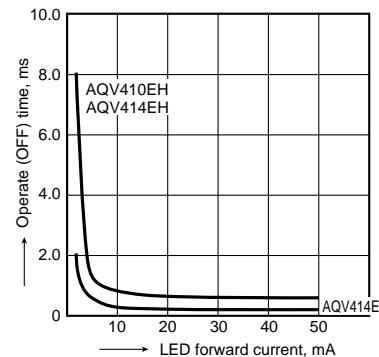

## 11. LED forward current vs. reverse (ON) time characteristics

Measured portion: between terminals 4 and 6; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

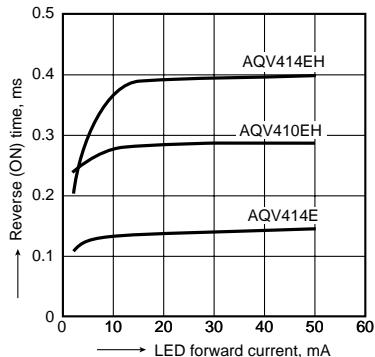

## 12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

