


**GLASS PASSIVATED
BRIDGE RECTIFIERS**
REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 1.5 Amperes
FEATURES

- Surge overload rating - 50 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in expensive product
- Mounting Position: Any

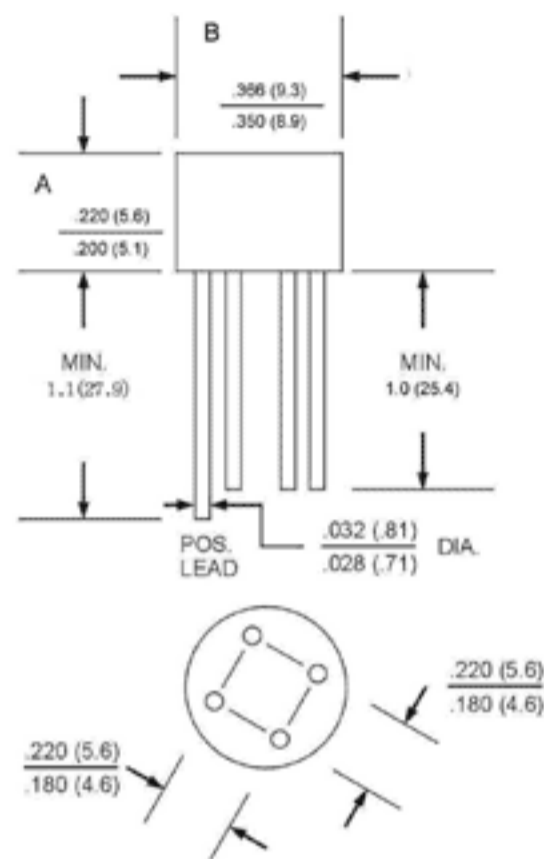

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

 Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	RB151G	RB152G	RB153G	RB154G	RB155G	RB156G	RB157G	UNIT
	W005G	W01G	W02G	W04G	W06G	W08G	W10G	
	W005MG	W01MG	W02MG	W04MG	W06MG	W08MG	W10MG	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A=25^\circ\text{C}$	1.5							A
Peak Forward Surge Current, 8.3ms single half sine-wave super imposed on rated load	50							A
I^2t Rating for fusing ($t < 8.3\text{ms}$)	5.0							A^2t
Maximum Forward Voltage Drop per Element at 1.0A Peak	1.1							V
Maximum Reverse Current at rated DC Blocking Voltage per element	10.0							μA
	1.0							mA
Operating Temperature Range T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range T_A	-55 to +150							$^\circ\text{C}$