


GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 10/15/25/35 Amperes

FEATURES

- Surge overload rating - 200~400 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has Underwriters Laboratory Flammability classification 94V-0
- Mounting Position: Any

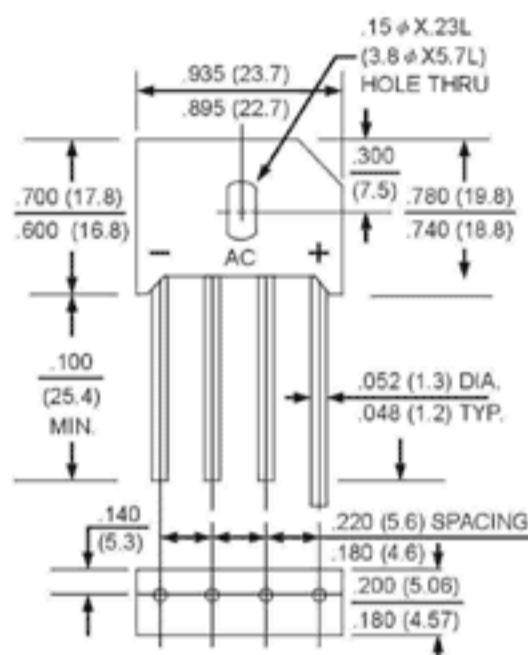

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	TBU(G)	TBU(G)	TBU(G)	TBU(G)	TBU(G)	TBU(G)	TBU(G)	UNIT	
		10005	1001	1002	1004	1006	1008	1010		
		15005	1501	1502	1504	1506	1508	1510		
		25005	2501	2502	2504	2506	2508	2510		
		35005	3501	3502	3504	3506	3508	3510		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @ $T_C=100^\circ C$ (with heatsink Note 2) @ $T_C=100^\circ C$ (without heatsink)	I_{AV}	10 3.6							A	
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC Method)	I_{FSM}	10A 15A 25A 35A							200 220 340 400	A
Maximum Forward Voltage at 5.0/7.5/12.5/17.5A DC	V_F	1.0							V	
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_J=25^\circ C$ @ $T_J=125^\circ C$	I_R	5.0 500							μA	
$I^2 t$ Rating for fusing ($t < 8.3ms$)	$I^2 t$	200							A ² S	
Typical Junction Capacitance per element (Note 1)	C_J	70							pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	2.2							$^\circ C/W$	
Operating Temperature Range	T_J	-55 to +150							$^\circ C$	
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ C$	

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.